




LED Weather Proof Bullet Camera

IV-BUFH5303IR

Features:

- 1/3" SONY Super HAD CCD
- 480 TV Lines
- 22m of Visible Distance at Night
- Weatherproof IP65
- 30 pcs IR LED
- Optional lens - 8mm or 12mm
- Cable located in the bracket

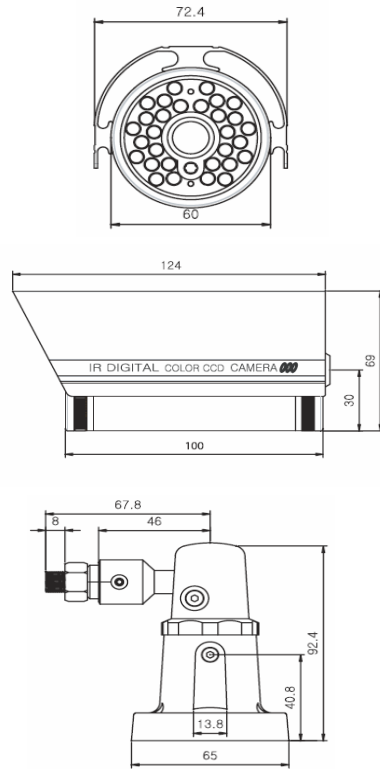

(unit: mm)

Specification	IV-BUFH5303IR	
Signal System	1/3" Interline transfer type color CCD (SONY)	
Image Sensor	525 Lines 2:1 Interlace	625 Lines 2:1 Interlace
Effective Pixels	768H × 494V (380K pixels)	752H × 582V (440K pixels)
Scanning System	525 Lines 2:1 Interlace	625 Lines 2:1 Interlace
Scanning Frequency	15.734KHz (H), 59.94Hz (V)	15.625KHz (H), 50Hz (V)
Resolution	480(H) TV Lines	
Shutter Speed	1/60 ~ 1/100,000 sec	1/50 ~ 1/100,000 sec
S/N Ratio	More than 48dB (AGC off)	
Sync. System	Internal	
Min. Illumination	0 Lux with IR-LED(30pcs)	
Video Output	VBS 1.0 Vp-p (75 Ω load)	
Lens	6mm Fixed	
Power Supply	DC12V ±10%	
Power Consumption	160mA (DC12) / 350mA at IR LED On (DC12V)	
Operating Temp	-10°C ~ +50°C	
Operating Humidity	90% RH Max.	