




# Weather Proof Bullet Camera

## IV-BUVFH5304DS

### Features:

- . 1/3" SONY CCD
- . 480 TV Lines, 0 Lux
- . 3.8~9.5mm Vari/Focal
- . Water Proof IP 66
- . Ultra low light
- . Indoor/outdoor
- . AC 24V / DC 12V

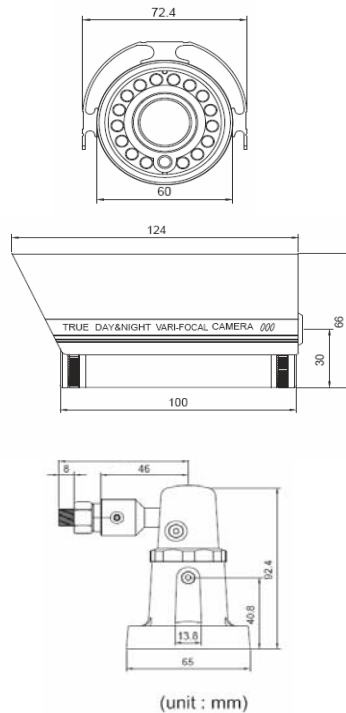

SPECIFICATION	IV-BUVFH5304DS
Image Sensor	1/3" Interline transfer type color CCD (SONY)
Effective Pixels	NTSC: 768H × 494V (380K pixels)    PAL: 752H × 582V (440K pixels)
Scanning System	NTSC: 525 Lines 2:1 Interlace    PAL: 625 Lines 2:1 Interlace
Scanning Frequency	NTSC: 15.734KHz (H), 59.94Hz (V)    PAL: 15.625KHz (H), 50Hz (V)
Resolution	480 TV - Lines
Shutter Speed	NTSC: 1/60 ~ 1/100,000 sec    PAL: 1/50 ~ 1/100,000 sec
S/N Ratio	More than 48dB (AGC off)
Sync. System	Internal
Min. Illumination	0 Lux with IR LED (16 pcs)
White Balance	ATW/AWB
Video Output	VBS 1.0 Vp-p (75 Ω load)
Lens	Vari-Focal DC Auto Iris Lens (F1.2)
Power Supply	DC 12V / AC 24V
Power Consumption	Normal: 210mA (AC24V) / 230mA(DC12V) IR-LED On: 330mA (AC24V) / 350mA(DC12V)
Operating Temp	-10°C ~ +50°C
Operating Humidity	90% RH Max.