




Wide Dynamic Dome Camera

IV-VRDD-5306

Features:

- . Sony 1/3" WDR (Wide Dynamic Range) High Resolution Color CCD
- . Vari-Focal DC Auto Iris Lens Built-in(optional lens available: 2.6-6mm; 9-22mm)
- . Various Automatic Functions (OSD)
- . WDR Level Control
- . White Balance Control
- . AGC (Automatic Gain Control) Function
- . Digital Zoom (x6): on/off
- . Mirror: on/off
- . 3 axis / IP65
- . True Day & Night
- . DC 12V / 24V

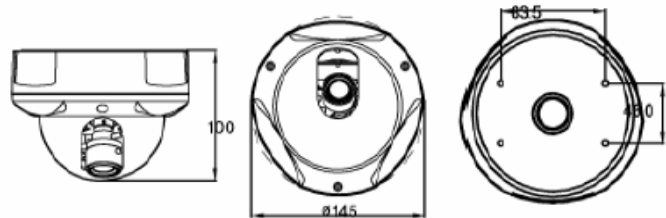

SPECIFICATION	IV-VRDD-5306
Image Sensor	1/3" Interline transfer type color CCD
Effective Pixels	768(H) x 494(V), 380K pixels
Scanning System	525 lines 2:1 Interface
Scanning Frequency	15,734KHz(H), 59.94Hz(V)
Resolution	480 TV-Lines(Color)/520TV-Lines(BW)
Gain Control	1/60 ~1/100,000 sec
S/N Ratio	More than 48dB (AGC Off)
Sync System	Internal
Min. Illumination	0.5Lux(Day) / 0.03Lux(Night) at F1.2
Video Output	VBS 1.0 Vp-p / 75Ohm
Lens	Vari-Focal DC AUTO Iris (F1.2)
Power Supply	DC 12V ± 10% & AC 23V ± 10%
Power Consumption	Max. 330mA (DC 12V)* - 250mA(AC 24V)
O.S.D	Built-in
Operating Temperature	14 °F ~ 122 °F
Operating Humidity	Max. 90% RH
Dimension	5.7" Ø
Weight	38.5 oz