




8MP DUHD Realtime Verifocal Camera

IV-BV28128MP-UHD

Features:

- . CPU: multimedia Soc H3519A
- . RMA: 4Gb
- . Flash Card: 128MB
- . Water resistance: IP66
- . Backlight Compensation(BLC)
- . Exposure
- . Wide Dynamic Range(WDR)
- . White Balance(AWB)
- . Image Stabilization
- . Defogging
- . Noise Reduction(NR)
- . Mirror

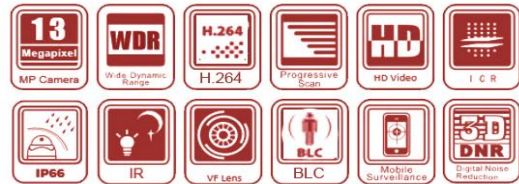

| Specification | | IV-BV28128MP-UHD | |
|---------------|-----------------------|---|---|
| Camera | Image Sensor | SONY IMX 274 | |
| | Sensor Resolutions | 13 Megapixel | |
| | Max Video Resolution | 3840*2160 | |
| | Sensitivity | 0.01Lux/0Lux(IR on) | |
| | Lens | 2.8~12mm | |
| | IR LED | 36pcs | |
| | IR Distance | 20mm | |
| | Support DC IRIS | NO | |
| | Angle of View | 72°(H) | |
| | ICR | Mechanism IR cut Filter | |
| Video / Audio | Vido Compression | H.265 | |
| | Video Profile | 3840*2160/2592*1520/2048*1520/1920*1080 / 1280*720 / D1 / CIF | |
| | Frame Rate | | Up to 30 fps @ 3840*2160 |
| | | | Up to 30 fps @ 2592*1944 |
| | | | Up to 30 fps @ 2048*1536 |
| | | | Up to 30 fps @ 1920*1080 |
| | | | Up to 30 fps @ 1280*720 |
| | Image Setting | | Brightness, Contrast, Hue, Saturation, Sharpness, AGC, Shutter Time |
| | | | . Backlight Compensation(BLC) |
| | | | . Exposure |
| | | . Wide Dynamic Range(WDR) | |
| | | . White Balance(AWB) | |
| | | . Image Stabilization | |
| General | Video Bitrates Adjust | CBR, VBR | |
| | Channel Control | RS-232 serial data communications | |
| | CPU | Multimedia SoC H3519A | |
| | RAM | 4Gb | |
| | Flash | 128MB | |
| | Water Resistance | IP66 | |
| | Operation Temperature | -10C ~ +50C | |