



1080P Vandal HD-Analog (AHD/TVI/CVI/CVBS) Mini PT Dome

IV-HDPT362MP

Features:

- 1/2.9" Low illumination CMOS
- Support HD-TVI /AHD/CVI/CVBS video output
- 2.0 MP, 1920 x 1080P
- Fixed Lens 3.6mm
- Max 25°/s pan speed and max 20°/s tilt speed
- Color: 0.2 Lux/F1.2; B/W: 0.01 Lux/F1.2
- Day / Night, D-WDR, BLC, 3D-DNR, Gain control, white balance
- Support UTC control, video transmission up to 1640 feet
- 355°pan range and 0° ~ 90° tilt range
- IP66, DC12V
- 2 pcs infrared light, IR distance up to 49 feet; IR-CUT technology, automatic switching when the light is low




355°pan range and 0° ~ 90° tilt range




High sensitivity
photo resistor
High-power
infrared light

2pcs infrared light: make the night as clear as daytime

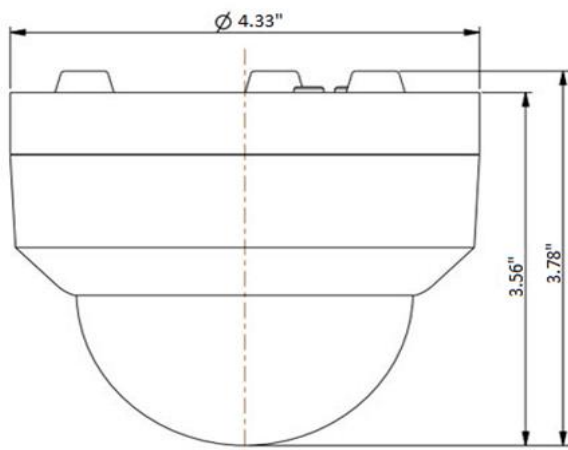

Product Dimension

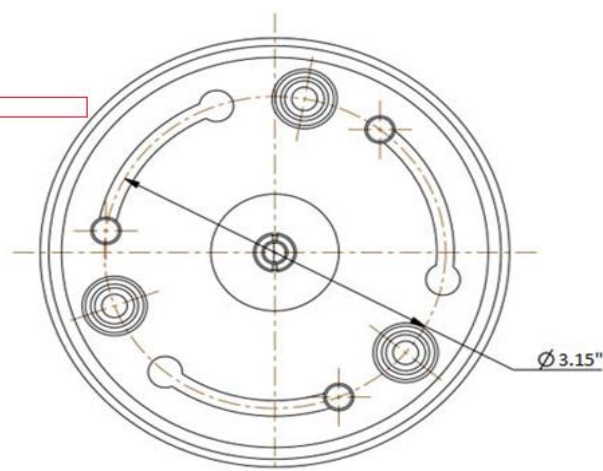

Screw-In Plate for Easy Installation

Specification	IV-HDPT362MP
Image Sensor	1/2.9" Low illumination CMOS
Effective Resolution	2.0 MP 1920 X 1080
Min. Illumination	Color: 0.2Lux@F1.2 ; B/W: 0.01Lux@F1.2
S/N Ration	≥50dB
Electronic shutter Speed	1/30 ~ 1/10000S
Wide Dynamic Range	d-WDR
Digital Noise Reduction	2D/3D digital
Focus mode	No
Day/Night	ICR
Lens	Fixed lens 3.6mm
Angle View	93°
IR LED / IR Range	2pcs infrared light / up to 49ft (15m)
Pan Range and Speed	Pan 355° rotate, speed 0 ~ 25°/S
Tilt Range and Speed	0° ~ 90°, speed 0 ~ 20°/S
Preset	16
Park Action	Support preset
White Balance	Auto / Manual
Exposure Mode	Auto / Manual
BLC	Supported
Gain Control	Supported
Digital Zoom	No
Edge Illumination Compensation	Supported
Video Output	AHD / TVI / CVI / CVBS
Video Port	BNC port
Power Supply	DC 12V/1A
Power Consumption	10W (max)
Operating Temperature	-4°F~140°F (-20°C ~ +60°C)
Operating Humidity	≤90%RH
Ingress Protection	IP66