

# IV-4CHDVR2IP-4K-CA



## Key Features

- Support H.265/H.264 video formats
- Support TVI,AHD, CVI,CVBS, IP cameras with adaptive access
- 4-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to
- 1920\*1080 Long transmission distance over coax cable


## Specifications

| Model                         | IV-4CHDVR2IP-4K-CA  |
|-------------------------------|---|
| Video/Audio Input             |   |
| Analog Video Input            | 4-ch, BNC   |
| IP Video Input                | 2-ch(only IP up to 6ch),each channel up to 4K   |
| Supported Analog Camera Types | <p><b>Support AHD input:</b><br/>           8MP@15fps (channel1)<br/>           5MP@20fps<br/>           4MP@30fps<br/>           3MP@30fps (channel1)<br/>           1080P@30fps<br/>           720P@60fps</p> <p><b>Support TVI input:</b><br/>           8MP@15fps(channel1)<br/>           5MP@20fps<br/>           4MP@30fps<br/>           3MP@20fps (channel1)<br/>           1080P@30fps<br/>           720P@60fps</p> <p><b>Support CVI input:</b><br/>           8MP@15fps(channel1)<br/>           5MP@20fps</p> |

|                           |   |
|---------------------------|---|
|                           | 4MP@30fps<br>1080P@30fps<br>720P@30fps<br><b>Support CVBS input</b>   |
| Audio Input               | 1-ch, RCA   |
| Two-way Audio             | 1-ch, RCA   |
| Channel Associated Audio  | 1-ch,RCA  |
| <b>Network</b>            |   |
| Incoming Bandwidth        | 40Mbps  |
| Outgoing Bandwidth        | 60Mbps  |
| Remote Users              | 128   |
| Protocols                 | TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE   |
| <b>Video/Audio Output</b> |   |
| CVBS Output               | 1-ch, BNC   |
| VGA Output                | 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz  |
| HDMI Output               | 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz  |
| Audio Output              | 1-ch, RCA   |
| Synchronous Playback      | 4-ch  |
| <b>Encoding</b>           |   |
| Recording Resolution      | 8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF   |
| Recording Frame Rate      | <b>Main stream:</b><br>8MP Lite@8fps(channel1 )<br>5MPLite@12fps<br>4MP Lite@15fps<br>3MP@15fps(channel1)<br>2MP@15fps<br>720P@30fps<br><b>Sub stream:</b><br>D1@30fps(Max) |
| <b>Hard Disk</b>          |   |
| SATA                      | 1 SATA interfaces   |
| Capacity                  | Up to 10TB for each HDD   |
| <b>External Interface</b> |   |
| Network Interface         | 1RJ45 10M/100M self-adaptive Ethernet Interface   |
| USB Interface             | Rear panel: 2 x USB2.0  |
| Serial Interface          | 1 x RS485   |
| <b>General</b>            |   |

|                        |  |
|------------------------|--|
| Power Supply           | 12V DC<br>Power Consumption: ≤ 8 W( without HDD )                    |
| Working Environment    | -10°C ~ + 55°C ( +14°F ~ +131°F ), Humidity ≤ 90% RH(non-condensing) |
| Dimensions(W×D×H)      | 260mm ×240mm× 46mm (10.2" × 9.4"×1.8")                               |
| Weight ( without HDD ) | ≤1.1 Kg ( 4.19lb )   |

## Dimensions

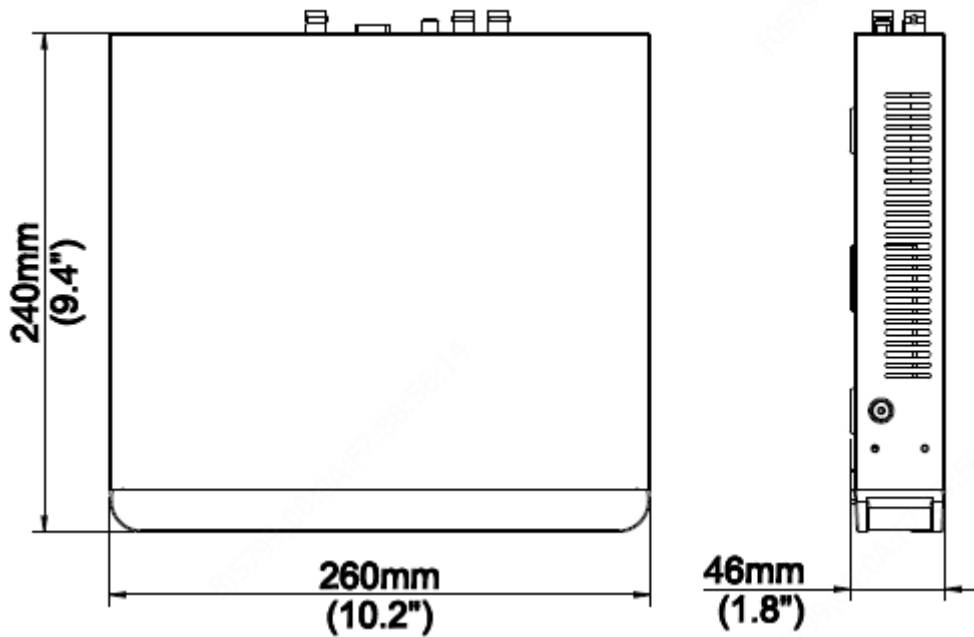

## Rear Panel

