



5MP IP Vandal Dome Camera with HDMI Output


IV-DF28PVM5MP-HDMI

Features:

- 1/2.8" 5MP Sony Sensor, NDAA Chipset Solution
- Max Resolution: 5MP (HDMI Output Max is 1080P)
- True WDR
- Support Face Detection, Face Record and Alarm Out
- Support Deterrence Message Upload & Deploy
- Support Audio Input & Output
- Support Alarm Input & Output
- Built-in TF Card Slot, Max 1TB Capacity
- DC12V & POE Power Supply

Brand Custom IP Vandal with HDMI Output

A PVM Camera for Loss Prevention Environment

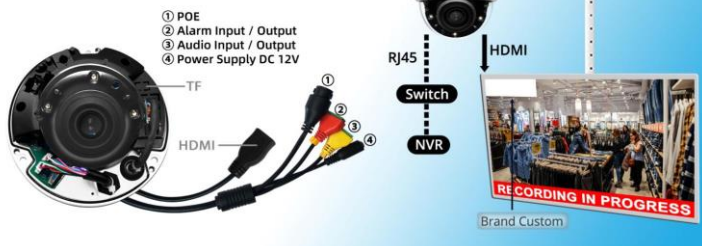

Camera Spec.	
IP Rating	IP66
Filter	Removable IR Cut Filter
Image Sensor	1/2.8" 5Mega-pixel Sony CMOS
Pixels	2688(H)×1944(V)
Horizontal Resolution	5MP Max
Lens	2.8mm Fixed
IR Range	20 Meters
Min Illumination	0 Lux When IR ON
Electronic Shutter	NTSC:1/30-1/100,000s PAL:1/25-1/100,000s
Video & Audio	
Video Compression	H.264 / H.265
Transmission Stream Rate	Dual Stream (Code Rate:36Kb~16M)
Frame Rate	1~25fps (PAL) ,1~30fps (NTSC)
Audio Compression	G711A、G711U
Network Interface	RJ45*1 10M/100M
Remote Control Interface	/
Audio Interface	input/output*1
Alarm Interface	input/output*1
Network	
Protocol	TCP/IP, UDP, SMTP, PPPoE, DDNS, IP: DHCP, FTP, RTSP, HTTP, IPv6
Network Support	ONVIF, API
Maximum Users	10
Web Language	English, Simplified Chinese, Traditional Chinese
Function	
Image Setting	Contrast, Brightness, Sharpness, Saturation , WDR、3DNR, HLC,BLC
Storage	NVR、VMS、TF Card
Video Type	Manual, Timing, Motion Detection, Face Detection
Alarm Triggers	Motion Detection, AI Face Detection
Alarm Event	Snapshot, Video, Alarm Output, Email Upload,
System/Explorer Support	IE, Chrome, Firefox, Safari
General Function	Flashing, Mirror, OSD information overlay, Camera angle, Banner
User/Password	User: admin / Password: idview123@ / IP: DHCP
General	
Power Supply	DC12V±10%, POE
Current Consumption	770mA (Max)
Dimension	114x81.8mm (4.49"x3.22")
Weight	600g
Storage Temperature	-30 ~ +60℃
Operating Temperature	-30 ~ +45℃