

# IV-32CHDVR4IP-2ST-CA



## Key Features

- Support H.265/H.264 video formats
- Support audio over coaxial cable(only for Uniview CVI protocol cameras)
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 32-channel BNC input
- Support 1-ch CVBS output, 1-ch VGA output, 1-ch HDMI output at up to 4K(3840 x 2160)
- HDMI and VGA simultaneous output
- Long transmission distance over coaxial cable
- Support mainstream cameras of ONVIF and RTSP protocols


## Specifications

Model	IV-32CHDVR4IP-2ST-CA
Video/Audio Input	
Analog Video Input	32-ch, BNC
IP Video Input	4-ch(only IP up to 36ch), each channel up to 8MP
Supported Analog Camera Types	<p><b>Support AHD input:</b>            8MP@15fps            5MP@20fps            4MP@30fps            1080P@30fps            720P@30fps</p> <p><b>Support TVI input:</b>            8MP@15fps            5MP@20fps            4MP@30fps            1080P@30fps            720P@30fps</p> <p><b>Support CVI input:</b>            8MP@15fps</p>

	5MP@25fps 4MP@30fps 1080P@30fps 720P@30fps <b>Support CVBS input</b>	
Audio Input	1-ch, RCA	
Audio Compression	G.711U	
<b>Video/Audio Output</b>		
CVBS Output	1-ch, BNC	
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
HDMI Output	4K(3840X2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
Audio Output	1-ch, RCA	
Synchronous Playback	16	
Live view display	HDMI/VGA: 1/4/6/8/9/16/25/36	
Two-way Audio	1-ch, RCA	
<b>Snapshot</b>		
FTP/Schedule/Event Snapshot	32-ch snapshot, up to 704*576 resolution	
<b>Network</b>		
Incoming Bandwidth	80Mbps (Up to 144Mbps after all analog channel conversion)	
Outgoing Bandwidth	160Mbps	
Remote Users	128	
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SMTP	
Browser	IE(IE10/11) for Windows Firefox (version 52.0 and above) for Windows Chrome(version 45 and above) for Windows Edge(version 79 and above) for Windows	
<b>Encoding</b>		
Recording Resolution	8MP Lite/5MP Lite/4MP Lite /1080P/720P/D1	
Recording Frame Rate	<b>Main stream</b>	<b>Sub stream</b>
	8MP Lite@8fps	D1@8fps
	5MP Lite@12fps	D1@12fps
	4MP Lite@15fps	D1@15fps
	1080P@15fps	D1@15fps
	720P@30fps	D1@30fps
Audio Sample Rate	8KHz,16 bit per channel	
Audio Bit Rate	64Kbps per channel	

Decoding	
Capability	Analog: 16 x 8MP Lite@8, 16x 5MP Lite@12, 16x 4MP Lite@15, 16 x 1080P@15, 16 x 720@30 IP: 16 x 720P@30, 8 x 1080P@30, 4 x 4MP@30, 2 x 8MP@30
Hard Disk	
SATA	2 SATA interfaces
Capacity	Up to 8TB for each HDD (The maximum HDD capacity varies with environment temperature)
Smart Alarm	
VCA Detection	Ultra Motion Detection(UMD) for analog:16-ch
VCA Search	Face Snapshot Search, Behavior Search, People Counting Report
General Alarm	
General Alarm	Motion Detection
Alert Alarm	IP Conflict, Network Disconnected, Disk offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal
External Interface	
Network Interface	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB3.0, Front panel: 1xUSB2.0
Serial Interface	1 x RS485
Alarm In	4
Alarm Out	1
General	
Power Supply	12V DC Power Consumption: ≤ 38 W( without HDD )
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions(W×D×H)	380mm ×326mm× 53mm (15.0" × 12.8"×2.1")
Weight ( without HDD )	≤2.6 Kg ( 5.72lb )
Certification	
Certification	UL /CE /FCC /RoHS /WEEE

## Dimensions

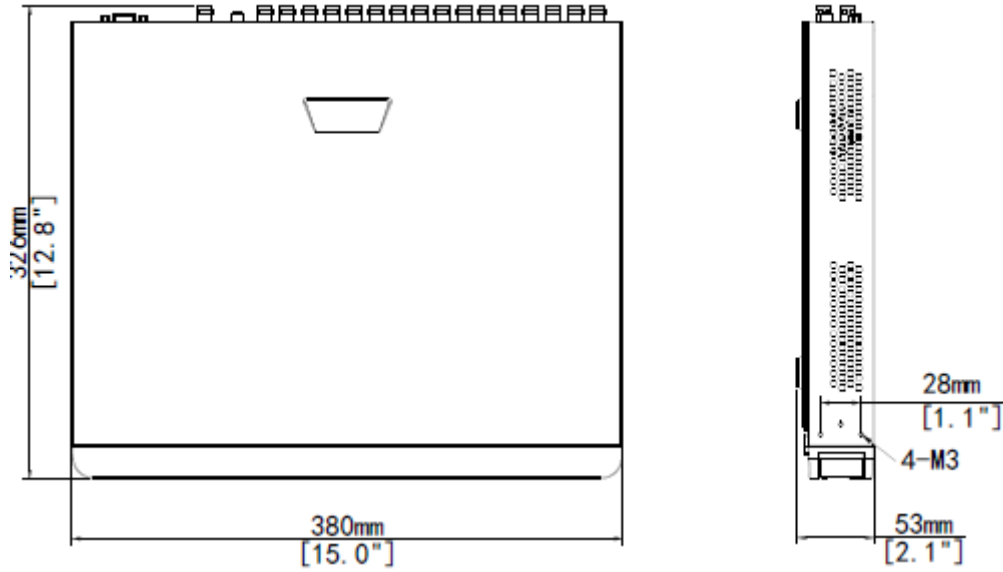

## Rear Panel

